

### GETTING STARTED


Before using the program, make a backup copy of the original disk. Operate the program using the backup and keep the original in a safe place.

This cloning program is designed to perform data setting and cloning for the wideband receiver IC-R10.

To use this program, the following hardware and software are required:

- IBM PC/AT or PS/2 compatible computer with an RS-232C serial port
- MS-DOS, PC-DOS or IBM DOS ver. 5.02 or higher
- OPC-478 CLONING CABLE

### CONNECTIONS

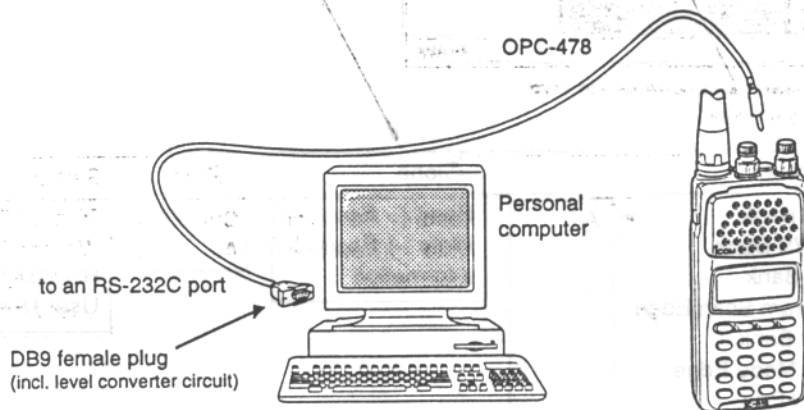

### INSTALLATION AND PROGRAM START UP

#### Installation and initial setup

Connect the receiver and PC as above and turn the receiver power ON in clone mode (while pushing [V/M] turn power ON) in advance.

To install the CS-R10 cloning software to ICOM\CSR10 directory of drive C while the program disk is in drive A, type as follows at the DOS prompt:

```
A:\INSTALL A: C:\ICOM\CSR10 [Enter]
```

└── Program drive ─┘      └── Target drive/directory ─┘

A target directory is created if it does not already exist; CS-R10 cannot be installed to the root directory. After the installation is finished, the CS-R10 initial setup screen appears and the receiver model is checked. Proceed as follows:

- ① Select the connected RS-232C (COM1/COM2) port with the [↑]/[↓] and [Enter] keys.
- ② Input a user name then push [Enter].
- ③ After the initial setup, CS-R10 is automatically launched. Set or modify the data as desired.
  - See the back page for operation.
- ④ Use the File sub menu to save the data or to exit the program.

#### Starting the program

To start the program after installation, operate as follows at the DOS prompt:

- ① Change to the installed directory.
  - C:\ICOM\CSR10 in case of the example at left.
- ② Type as follows to start:

```
CSR10 [Enter] (at the installed directory)
```

#### Operating from a floppy disk

This program can be operated from a floppy disk.

- ① Insert the backup disk into the floppy disk drive.
- ② Select the floppy disk drive as the current drive.
- ③ Select the "CSR10" directory.
- ④ Type "CSR10," then push [Enter] to start.

**NEVER** remove the program disk from the floppy disk drive while the program is running.  
**NEVER** set the floppy disk as write-protected.  
 Cloning will take 20 sec. or more when operating from a floppy disk.

Portions of this software are copyrighted by Microsoft Corporation. MS-DOS is a Microsoft trademark. IBM PC/AT, PS/2, PC-DOS and IBM DOS are IBM trademarks.

